

# SoniShield Display

SoniShield Display is a wireless display for local viewing and alarming of current monitored conditions. Displays current conditions, 24-hour minimum/maximum ranges, and features split-screen capability for displaying data from two Sonicu sensors.

The SoniShield Display pairs easily with a SoniShield Duo device via onboard Bluetooth, making it the perfect companion for temperature monitoring of vaccines, medications, research samples, ambient room conditions, and other areas where a local display is preferred.




Wireless Display



## SPECIFICATIONS

<b>Display:</b>	2.9" E-Ink Red/Black/White Display, 296 x 128 pixels
<b>Alarming:</b>	Local Audible Buzzer (configurable for silent mode)
<b>Size:</b>	3.82" (97.0mm) x 2.46" (62.5mm) x 1.03"
<b>Weight:</b>	(26.2mm), 6.4oz (181g)
<b>Construction:</b>	ABS Plastic Housing
<b>Mounting:</b>	Magnet Mount Included, Wall mount (P/N 113600) sold separately.
<b>External Ports:</b>	Micro-USB charging port
<b>Power Modes:</b>	5200 mAh Li-ion polymer 3.7V rechargeable battery, 5V 1A DC wall adapter
<b>Radio:</b>	WiFi/Bluetooth low-energy (BLE)

## SINGLE INPUT VIEW

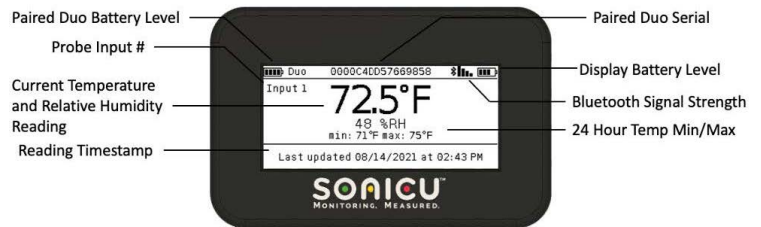

## DUAL INPUT VIEW WITH THRESHOLD ALARM

